

YOUR
COLT
WARRANTY

All Colt's Revolvers and Automatic Pistols are built to exacting standards of engineering and manufacturing and are rigidly inspected before leaving our factory. They are warranted to be free from defects in material and workmanship under normal use and service for a period of 12 months from the date of purchase. Colt's obligation is limited to repairing or replacing, F.O.B. Hartford, Conn., U.S.A., any part of a Colt's Revolver or Automatic Pistol which Colt's examination discloses to be thus defective.

This warranty is in lieu of all other warranties, expressed or implied. This warranty shall not apply to defects resulting from accidents, alterations or misuse. If—in the opinion of Colt's gunsmiths employed at Hartford, Connecticut—modifications, changes or additions made outside our factory have affected the operation of the weapon to render it faulty, this warranty shall be void. This warranty shall also be void if any part not of Colt's manufacture has been incorporated, or if other than factory loaded ammunition is fired in it.



**COLT'S PATENT FIRE ARMS
MANUFACTURING COMPANY, INC.**

150 Huyshope Avenue,
Hartford 14, Connecticut, U.S.A.

Form SA-100

Printed in U.S.A.



Single Action
**ARMY
REVOLVER**

Loading • Firing • Correct C

COLT

Single Action Army REVOLVER




LOADING
FIRING

CORRECT CARE

GENERAL. Your Colt Single Action Army Revolver is one of the most simple, rugged and dependable handguns ever manufactured. Used correctly it will serve you indefinitely without ever requiring major repairs. Before handling or shooting your Single Action, **BE SURE** to read this sheet and carefully note the precautions listed. These precautions, though important, are simple, and correct handling will quickly become automatic with you. The precautions apply to **EVERY** single action revolver and are dictated by the inherent mechanical structure of **ALL** handguns of this type.

ACTION. "Single Action" means that the hammer of this revolver must be drawn back – or "cocked" – with the thumb, before each shot is fired. When cocking the Single Action Army, you will notice that there are *three* distinct hammer positions as follows:

1. **SAFETY POSITION** – with the firing pin held safely away from the cartridge primer.
2. **HALF-COCK** – with the hammer approximately half way back and the cylinder bolt depressed, leaving the cylinder free to rotate.

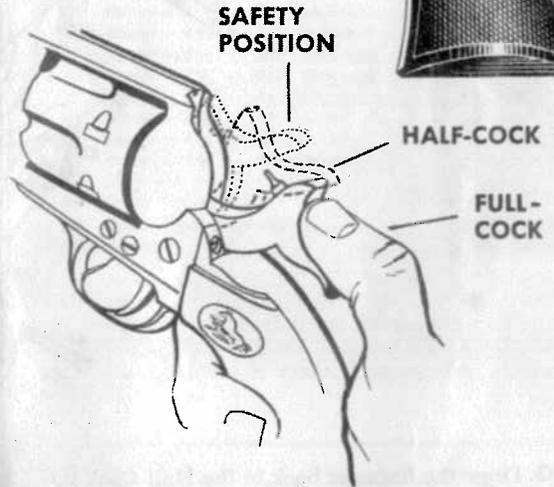

3. **FULL-COCK** – with the hammer all the way back and the revolver ready to fire.

IMPORTANT – The Safety and Half-Cock notches are designed to *prevent* the trigger from being pulled, so **DO NOT** try to force the trigger with the hammer in either of these two positions. If it is desired to lower the hammer, pull the hammer back slightly; then pull the trigger and lower the hammer *carefully*.