




BY APPOINTMENT TO
HER MAJESTY QUEEN ELIZABETH II
GUN AND CARTRIDGE MAKERS



BY APPOINTMENT TO
H. R. H. THE DUKE OF EDINBURGH
GUN MAKERS

GUNS AND RIFLES

BY JAMES DUNLOP & SONS LTD

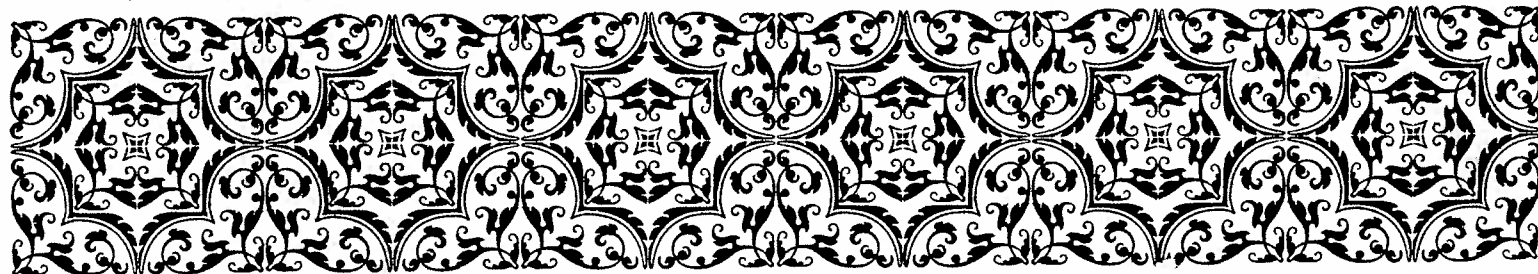



BY APPOINTMENT TO
HER MAJESTY QUEEN ELIZABETH II
GUN AND CARTRIDGE MAKERS



BY APPOINTMENT TO
H.R.H. THE DUKE OF EDINBURGH
GUN MAKERS

DIRECTORS:

LORD SHERWOOD
(CHAIRMAN)
V. B. J. SEELY
C. H. LAWRENCE, M.B.E.
(MANAGING DIRECTOR)
A. J. R. COLLINS, C.V.O.
HON. R. B. BEAUMONT

JAMES PURDEY & SONS LTD.

(INCORPORATING JAMES WOODWARD & SONS)

GUN, RIFLE AND CARTRIDGE MAKERS

57-58 SOUTH AUDLEY STREET, W.1

TELEPHONE: GROSVENOR 1801/2.

TELEGRAMS: PURDEY—LONDON, W.1.

SHOOTING SCH

AT WEST LONDON SH
GROUNDS,
NORTHOLT, GREENI
MIDDLESEX.

4th December 1966

To be to congratulate and thank you for your letter of the 1st of December with reference to the 12 gauge gun of our make No. 99280, which was built in 1965.


In reply to your enquiry we would state that the side-locks of the gun should be oiled etc. at each shooting season.

We have pleasure in enclosing herewith a copy of our Book of Instruction, together with instructions for the care and maintenance of our guns.

Assuring you of our best care and personal attention to your wishes at all times.

We are, Sir,
Your obedient Servants,
JAMES PURDEY & SONS LTD.

Harry Purdey
Managing Director.

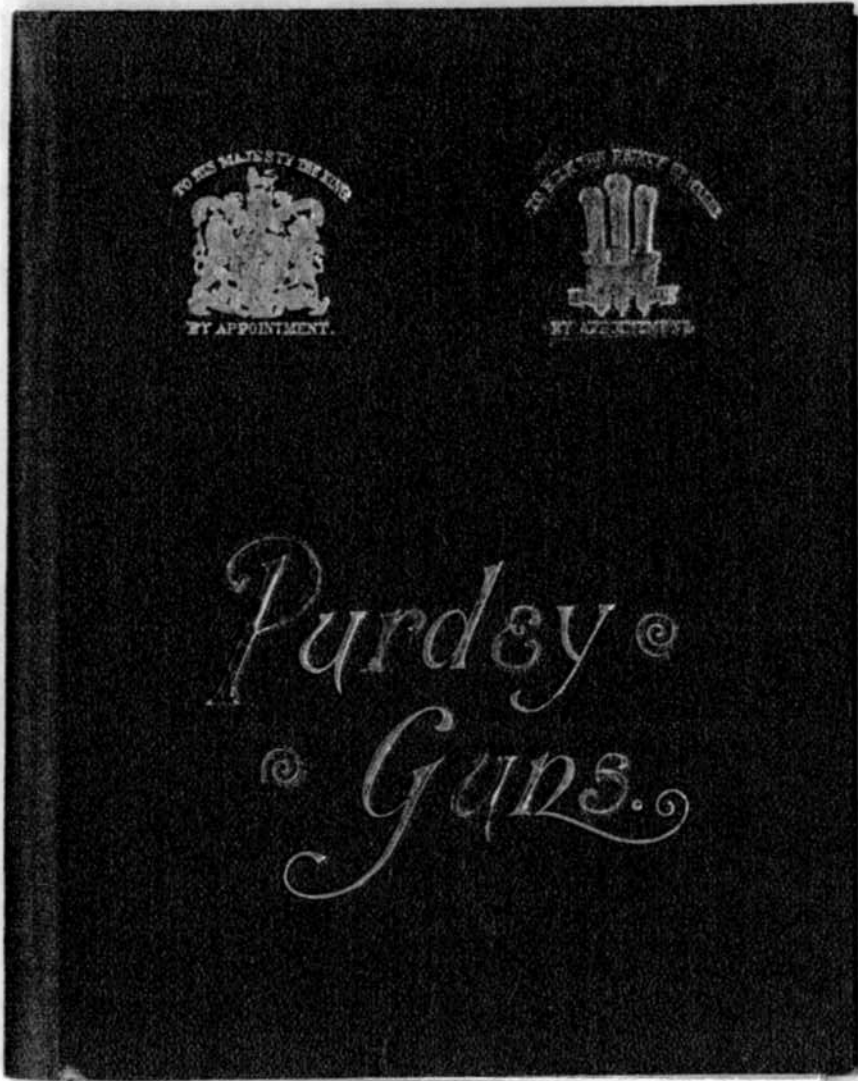

GT 4-5M-12-63

ABERCROMBIE & FITCH Co.

JAMES PURDEY

Grade *BEST QUALITY*

No. *27249*

Gauge *12*

Bbls. *28*


Chamber L'gth. *2 3/4*

Weight *7*

Drop *2 1/2 x 1 1/2 x 1 1/2*

Right *MOD*

Left *FULL*



Make _____

Number _____

PURDEY GUNS

BARRELS

Immediately after use the barrels must be wiped through with dry tow to remove any residue from the cartridges. The tow should then be changed and the new clean tow smeared with gun oil, and the internal bore of the barrel well oiled. The bore should be left well oiled after cleaning. The outside of the barrels should be wiped over with an oily cloth. Care should be taken to see that all moisture is removed from the luggers, and from the sides of the ribs.

ACTIONS

Actions should be wiped over, and all traces of moisture and dirt removed from the slots. A thin layer of oil should be left on all parts of the action and on the triggers.

STOCKS AND FOREPARTS

ON NO ACCOUNT should any gun oils be used on the stocks or forend woods. When the guns leave the Factory, all the wood parts are specially treated with a preparation of oils and waxes, so any mineral oil used on the stocks or forends will destroy the protective preparation with which the wood is treated. Should the stocks or foreparts be wet and become dull, wipe them dry with a clean cloth. A smear of linseed oil on the fingertip should then be rubbed over each stock. This should be left overnight, and next morning the stock should be rubbed briskly with the palm of the hand until a good polish appears. No other work on the stocks or foreparts is Necessary or Desirable.

EJECTORS

A very thin oil should be used to wipe the cams of the ejectors.

IMPORTANT Only in an emergency should locks be removed from a gun. In all other cases of a breakdown, the gun should be sent to a gunmaker for the necessary repairs.